

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/003970

International filing date: 17 October 2005 (17.10.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0422939.9
Filing date: 15 October 2004 (15.10.2004)

Date of receipt at the International Bureau: 30 November 2005 (30.11.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 3 9 7 0



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

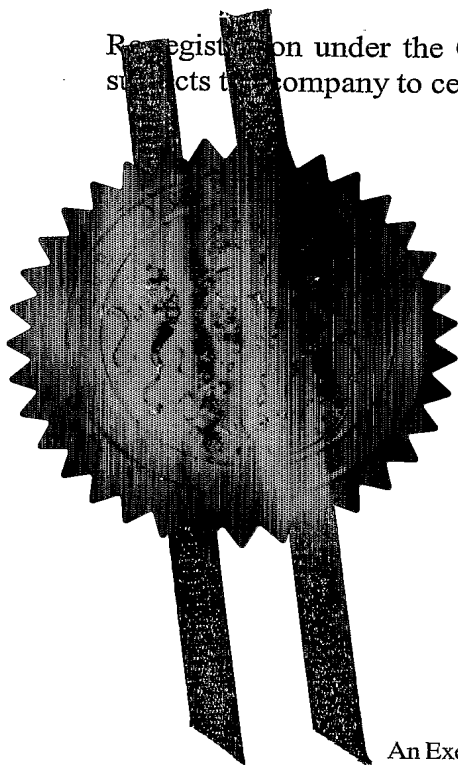

Signed *Andrew Gersey*
Dated 25 October 2005



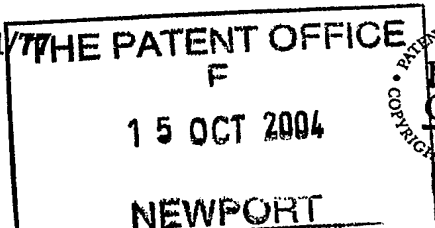

170ET04 E933880-1 D00350
P01/7700 0.00-0422939.9 NONE

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

BQ/PM/P/29085.GB

2. Patent application number

(The Patent Office will fill in this part)

0422939.9

15 OCT 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

GAMESMAN LIMITED,
CROMPTON FIELDS,
CROMPTON WAY,
CRAWLEY,
WEST SUSSEX,
RH10 2QR.
UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7356850002

4. Title of the invention

PUSH BUTTON ASSEMBLY

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WILSON GUNN M'CAW
5TH FLOOR, BLACKFRIARS HOUSE,
THE PARSONAGE,
MANCHESTER,
M3 2JA.
UNITED KINGDOM

Patents ADP number (if you know it)

7153927001 /

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 9 /

Claim(s)

Abstract

Drawing(s) 2 x 28

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Mr. B. Quest

Date 14/10/04

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. B. Quest - 0161-827-9400

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PUSH BUTTON ASSEMBLY

The invention relates to push button assemblies and is particularly though not exclusively concerned with a push button assembly for use within an amusement or gaming machine.

5 A push button assembly as used with an amusement or gaming machine typically comprises a push button, a housing, a lamp and switch unit, and an actuating structure with a spring.

GB 2350722 A discloses a push button assembly of this kind. The push button comprises a translucent disc, a transparency and a fitted lens
10 cap. The housing is an open ended tubular structure with a flange around one end defining a bezel. The push button is movably retained within the flange and the lamp and switch unit is attached removably to the opposite open end of the housing so that the lamp is within the housing for illumination of the button and the switch is outside the housing. The
15 actuating structure comprises a hollow stem with at least one hooked finger which is located in the housing between the push button and the switch. The tubular structure of the housing is threaded. In use the tubular structure is passed through an aperture in a panel of the machine with the flange on the outside and a nut is screwed onto the tubular structure against the
20 underside of the panel to hold the housing firmly attached to the panel.

With this known push button assembly the length beneath the panel which includes the lamp and switch unit is relatively large. This can be a problem in machines where there is little space behind the panel.

An object of the present invention is to provide a push button
25 assembly which can be made with reduced length so as to be suitable for

use where space for installation is restricted.

According to the invention therefore, there is provided a push button assembly comprising a housing with an open end thereto bounded by a flange structure, the housing being insertable through an aperture in a panel with the flange on an outer side thereof, a fixing means for fixing the housing relative to the panel beneath the panel, a push button movably mounted within the open end and flange structure, a lamp mountable relative to the housing for illuminating the button, a switch mountable relative to the housing for operation by movement of the button via an actuating structure disposed between the button and the switch within the housing, characterised in that the lamp and the switch are mounted within the housing so that at least a major part of the lamp and the switch is located within the confines of the housing.

With this arrangement, the push button assembly beneath the panel can be of reduced length since the lamp and the switch are incorporated in the housing rather than being attached thereto substantially externally of the housing. Less space may therefore be needed for installation beneath the panel.

Preferably the housing has a generally open square frame structure comprising side wall structures with the flange structure mounted at one end. Alternatively the frame structure may be generally rectangular or circular or polygon in shape. The housing may provide abutments for supporting the actuating structure. Preferably one of the side wall structures may be generally open to provide access to the interior of the housing. The housing may provide holes for the fixing means to pass through. The frame

structure is preferably shorter in axial length than the horizontal length of each of the side wall structures.

Preferably also, the flange has outwardly inclined side walls which taper towards the top free end.

5 The fixing means may comprise one or more clips provided on one or more of the side wall structures, engageable with one or more holes provided in the panel. There may be pairs of spring clips on the outer sides of some or all opposing side wall structures. The or each clip may be engageable with the aperture for the housing or a hole separate thereto.

10 The push button may comprise the switch actuating structure, mounted upon which are a translucent cover part and a translucent cap. The translucent cap may have an upwardly convex domed top wall with downwardly projecting edge walls. The cover part may have a projection on its lower surface for interaction with the spring members. The cover part
15 and the cap may be the same in shape as the frame structure of the housing. Alternatively, the cover part and the cap are the same in shape as the opening provided by the flange. There may be a transparency placed between the cap and the cover part which provides printed words and/ or graphics, which may be specific to the machine.

20 Preferably the switch actuating structure has a generally square frame with a square bottom wall provided with a centrally disposed aperture. Two elongate legs with outwardly turned feet may be provided projecting from the centre of opposed bottom wall edges at right angles to the edges. Preferably also, the bottom wall has spring members fixed across the frame
25 to provide the relative movement of the button within the flange structure.

Two of the opposed spring members preferably have push rods mounted in a downwardly projecting direction, which project through apertures in the bottom wall so as to be displaceable within the button.

5 Preferably the switch comprises a rectangular body with an upwardly projecting actuator and connector terminals. The body most preferably overlies the inner side wall structures within the confines of the housing with the terminals projecting out of the housing. Most preferably the switch is a microswitch.

10 Preferably, the lamp is disposed in the centre of the housing and may be mounted on a rectangular strip with connector terminals. The lamp may be a filament lamp but is most preferably an LED or a plurality of LEDs. The strip preferably overlies the switch within the confines of the housing with the terminals projecting out of the confines of the housing. The lamp may emit white or coloured light when energised with varying intensities.

15 Preferably, the lamp strip and the switch body are separate components. Alternatively, they may be a single unit. Preferably the lamp and the switch are removably mounted within the housing and most preferably the strip and the body of the lamp and the switch respectively completely within the confines of the housing. The switch body and lamp
20 strip may snap onto a part of the moulding and may be held in place by pegs which pass first through the body of the switch and then through the strip of the lamp. Alternatively, screws could be used in place of the pegs, or the unit could be glued into position.

The terminals from the lamp and the switch may be connected to
25 appropriate operating circuitry of an amusement or gaming machine. The

lamp can be activated in different ways on different occasions which may correspond to stages in the game.

When fixed to an amusement or gaming machine the push button assembly may be mounted on a panel of the machine, which may be a glass or plastics or metal or other panel, by insertion of the housing frame through the aperture in the panel, the aforesaid spring clip or clips springing outwards into position on the underside of the panel, resulting in the flange and the push button being on the exterior of the panel, the lamp and the switch being below the panel, within the confines of the housing, except for the terminals which project downwardly for connection to the appropriate circuitry.

The invention will now be described further by way of example only and with reference to the accompanying drawings in which:

- Figure 1 is a perspective view of one form of an assembled push button assembly in accordance with the invention;
- Figure 2 is a diagrammatic side view of the assembly of figure 1;
- Figure 3 is an exploded upright perspective view of the push button assembly; and
- Figure 4 is an exploded side perspective view of the push button assembly.

As shown in figure 3 a push button assembly has a push button 1, a housing 2, a switch unit 3, and an illumination unit 4.

The push button 1 comprises a switch actuating structure 5, a translucent cover part 6 and a square translucent cap 7 having an upwardly slightly convexly domed square top wall bounded by peripheral downwardly

projecting edge walls.

The switch actuating structure 5 comprises a square frame 8 bounding an attached square bottom wall 9 with a central aperture 10. A push rod 12 projects downwardly from the bottom wall 9 at right angles thereto in the region between the central aperture 10 and the centre part of opposite edges of the bottom wall 9. A spring (not shown) sits around the push rod 12 which then sits within a cylinder 29 provided by the housing so the push rod is displaceable therewithin. A further rod (not shown) is provided on the opposing side of the bottom wall 9, which is positioned above the switch unit 3. Centrally of two of the bottom wall edges at right angles to the aforesaid edges there are two elongate legs 13 which project downwardly from the wall at right angles thereto and terminate at their free ends in outwardly turned feet 14.

The housing 2 comprises a generally square frame 18 structure having at one end a peripheral flange 15 with outwardly inclined side walls tapering towards the top free end of the frame structure and peripheral side wall structures 16 depending from the underside of the peripheral flange 15. Two opposed side wall structures 16 are provided on their outer side with respective pairs of spring clips 17. One such side wall structure has fixing holes therethrough.

The interior of the housing between the side wall structures 16 is generally open and the illumination unit 4 and the switch unit 3 are mounted within the housing 2.

The frame structure is of short axial length and in particular is shorter than the horizontal length of each side wall structure 16.

The switch unit 3 is a conventional microswitch having a rectangular body 19 with an actuator projection 20 projecting upwardly from a narrow top side body and three connector terminals 21 projecting downwardly from the opposite narrow bottom side of the body 19. The body is located within the housing 2 and overlies the inner side of the side wall structure 16b. The body 19 is contained wholly within the confines of the housing 2 and the terminals 21 project downwardly out of the housing as shown in figure 2. The switch unit 3 is held in position by the body snapping onto a part of the moulding and pegs passing through aligned holes 22 in the side wall structure and the body 19 of the switch unit 3. Alternatively screws or other means may be used to fix the switch body in position.

The illumination unit 4 comprises a lamp which is an LED 25 fixed to connection terminals 23 mounted on a supporting strip 24. The strip 24 and LED 25 are fixed within the housing 2 so as to be wholly within the confines of the housing. The strip 24 overlies the body of the switch unit 3 and is held in position by the aforesaid pegs which also pass through holes 22 in the strip 24. The terminals 23 project downwardly out of the housing parallel to the switch unit terminals 21. The illumination unit 4 is fixed in position with the LED 25 disposed centrally of the housing. Alternatively a plurality of LEDs which might not be centrally disposed may be used.

The push button 1 is assembled with the housing by insertion of the frame 8 downwardly into the housing through the peripheral flange 15 so that the legs 13 slide along the inner sides of the two opposed side wall structures 16a, 16c of the frame structure. The legs 13 are springy and deflected slightly inwardly until the legs reach recesses 26 at the bottom

edges of the side wall structure. The feet 14 spring back into these recesses 26 to lock the frame structure in a position at which the frame is wholly within the confines of the housing. In this position the central aperture 10 fits around the lamp 25 and one of the push rods 12 is aligned with the microswitch actuation projection 20.

The cover part 6 sits on the frame 8 and the cap 7 sits on top of the cover part around the frame 8 and projects partially beyond the open top end of the peripheral flange 15. The cap 7 is retained within the flange 15 by interengagement with the frame 8 but is free to move through a limited distance into and out of the flange 15 being limited by abutments 27 in the housing. The cover part 6 has a projecting part 28 on its lower surface.

The cap 7 can be pushed in with the push rod 12 pressing against the resistance of the spring to cause the opposing rod to move downwardly to actuate the microswitch 20.

The push button assembly can be mounted on a panel by insertion of the frame structure 18 of the housing through a hole in the panel to a position at which the peripheral flange 15 abuts inside the panel around the hole.

The push button is held in position by the four spring clips 17 springing outwardly into position on the underside of the panel.

The cap 7 projects freely from the panel for manual operation and the peripheral flange 15 provides a bezel around the cap 7.

On the underside of the panel the terminals 21, 23 project freely for connection to appropriate circuitry. Other parts of the assembly do not take up much space beneath the panel and it will be noted that the assembly can

be fixed securely in position without requiring application of any fixing structure, or manipulation of the assembly beneath the panel.

The panel may be a screen-printed panel of a fruit machine or other amusement or gaming machine whereby the lamp terminals 23 can be
5 connected to the usual operating circuitry so that the lamp 25 is switched on with a steady or flashing light at appropriate occasions to signify that the button assembly can be used to initiate a game play procedure ort event or for other purposes; and the switch terminals 21 can be connected to the usual operating circuitry to cause activating impulse to be fed thereto by
10 operation of the push button when appropriate.

It is of course to be understood that the invention is not intended to be restricted to the details of the above embodiments, which is described by way of example only.



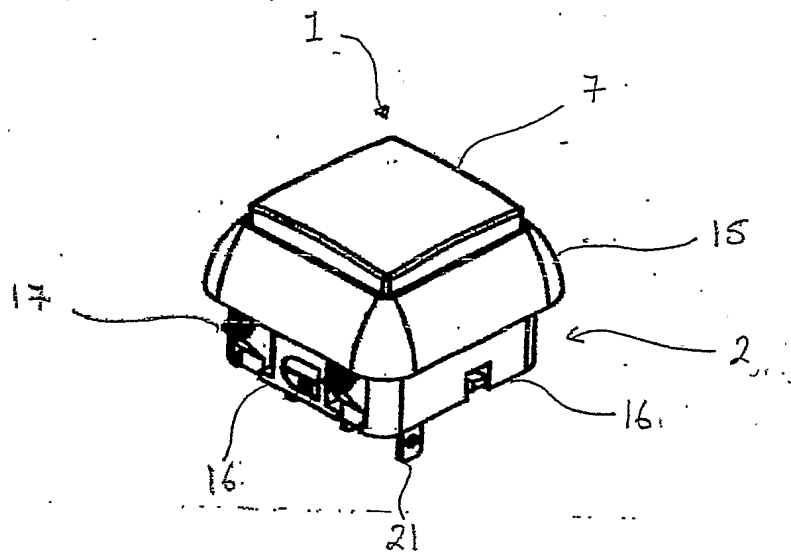


FIG 1

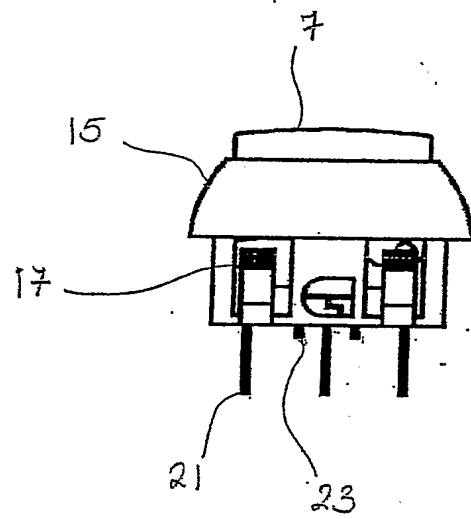


FIG 2



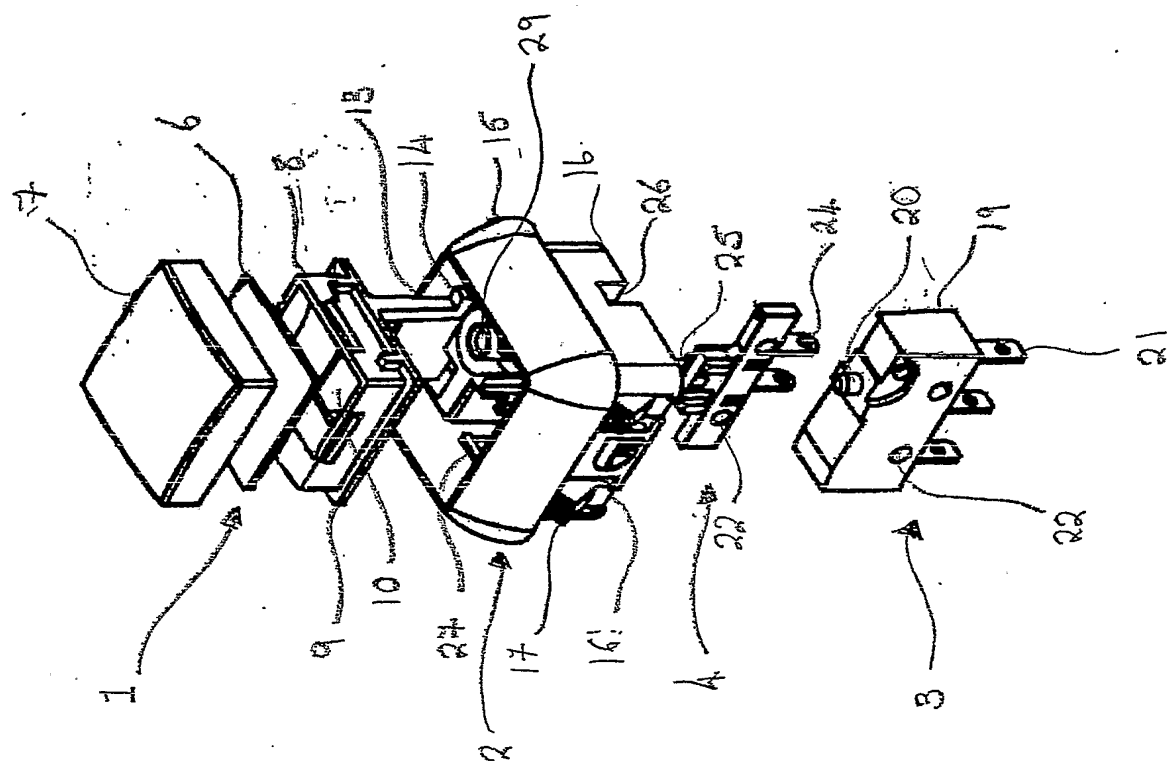


FIG. 3

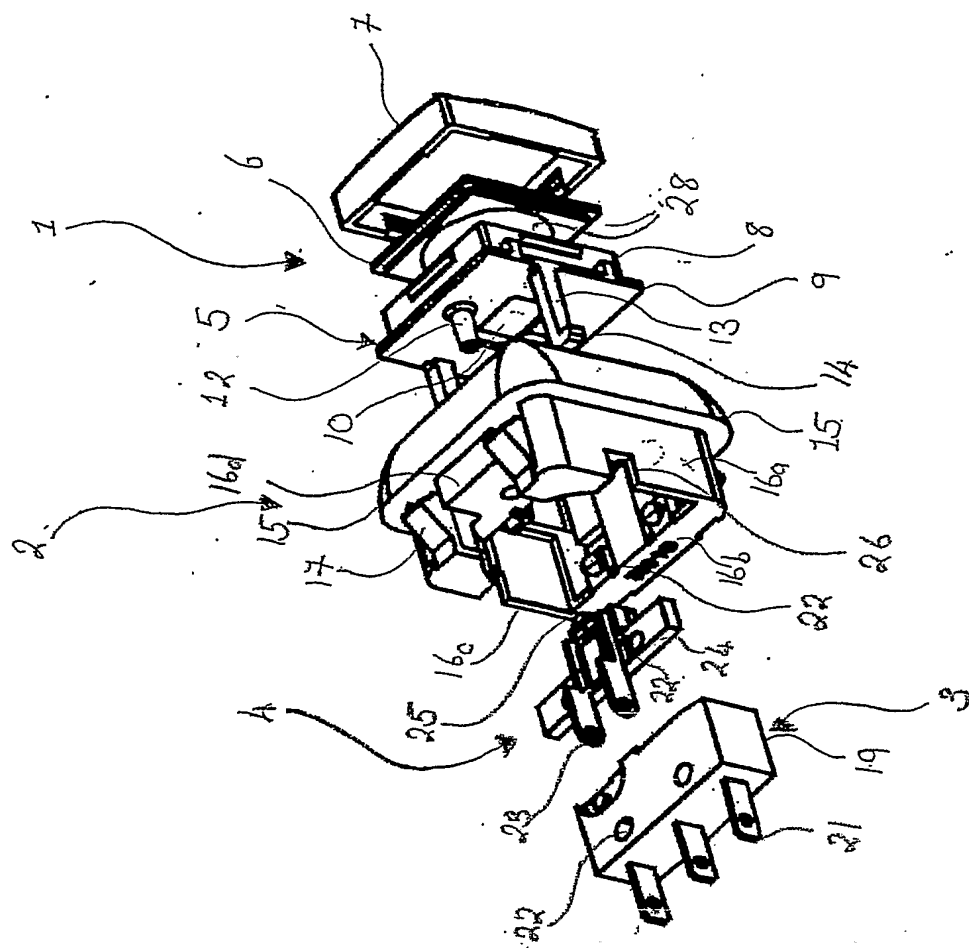


FIG. 4

